

In the box


HD 480 PRO |  
HD 480 PRO Plus



HD 480 PRO




HD 480 PRO Plus

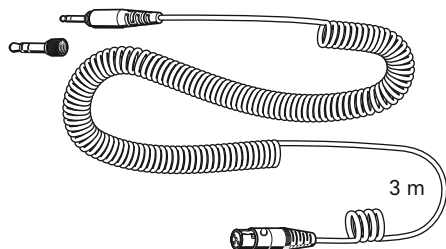




SENNHEISER

HD 480 PRO  
HD 480 PRO Plus

- Quick Guide
- Kurzanleitung
- Guide de démarrage rapide
- Guida rapida
- Instrucciones resumidas
- Instruções resumidas
- Beknopte gebruiksaanwijzing
- Krótko instrukcja obsługi
- Snabbguide
- Kort vejledning
- Πίκαοδηγ
- Σύντομες οδηγίες
- Kısa Kılavuz
- Краткая инструкция
- 快速指南|快速使用指南
- クイックガイド
- 요약 안내서

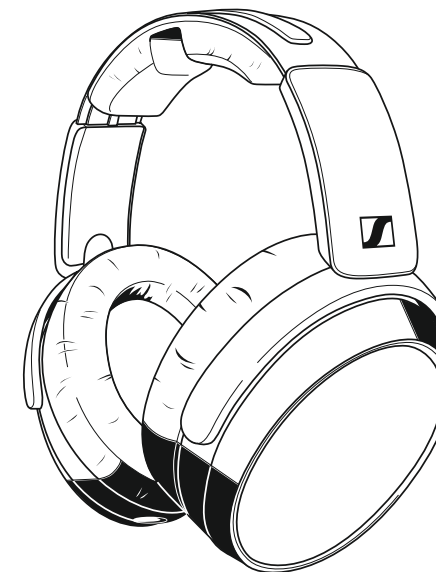

Setup

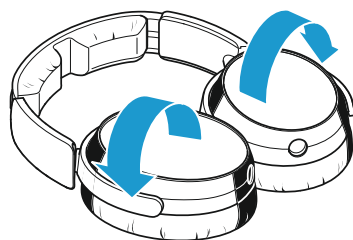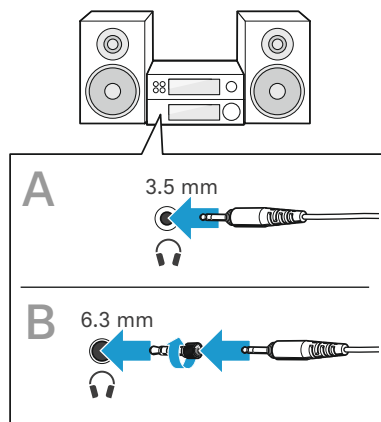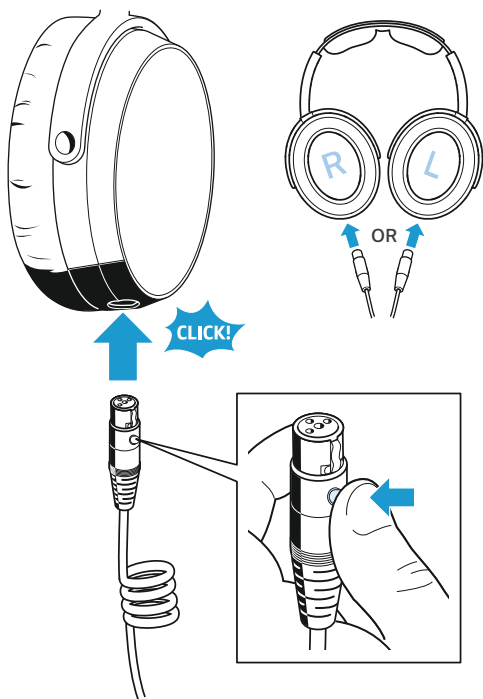

HD 480 PRO



HD 480 PRO Plus




Sennheiser electronic SE & Co. KG




Am Labor 1, 30900 Wedemark, Germany  
www.sennheiser.com

Printed in Germany, Publ. 08/25, 402216/A01

## Wearing

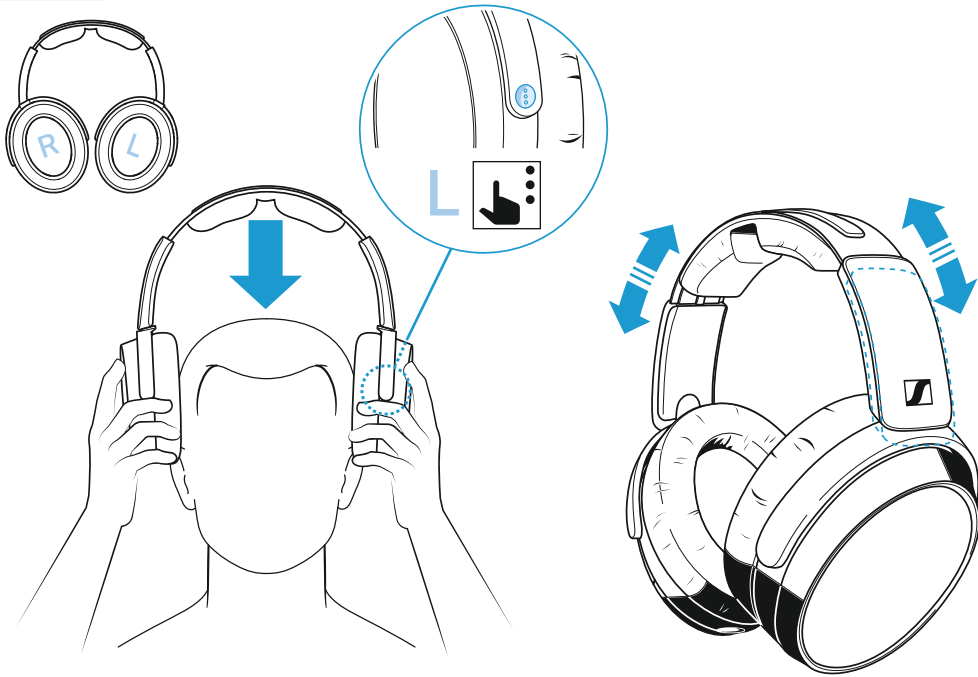


## Changing headband | ear cushion | dust protection

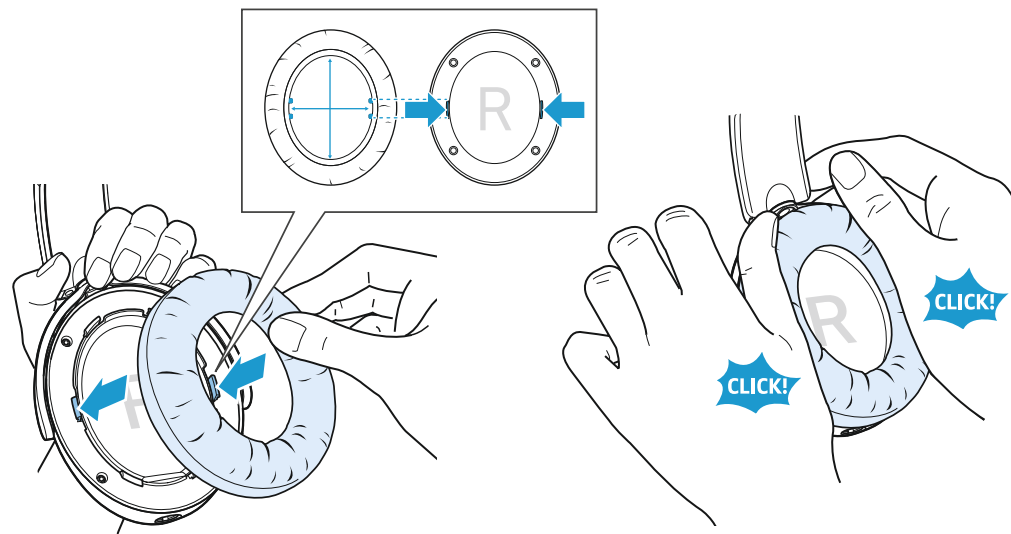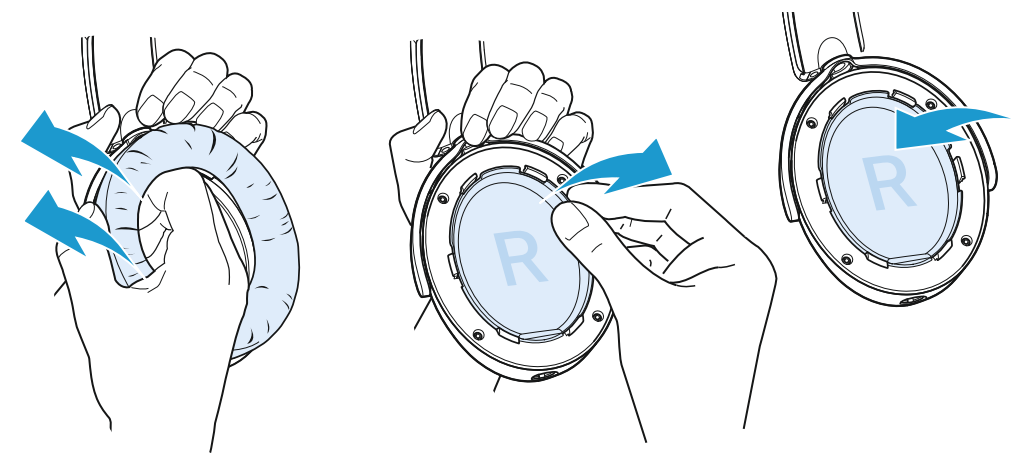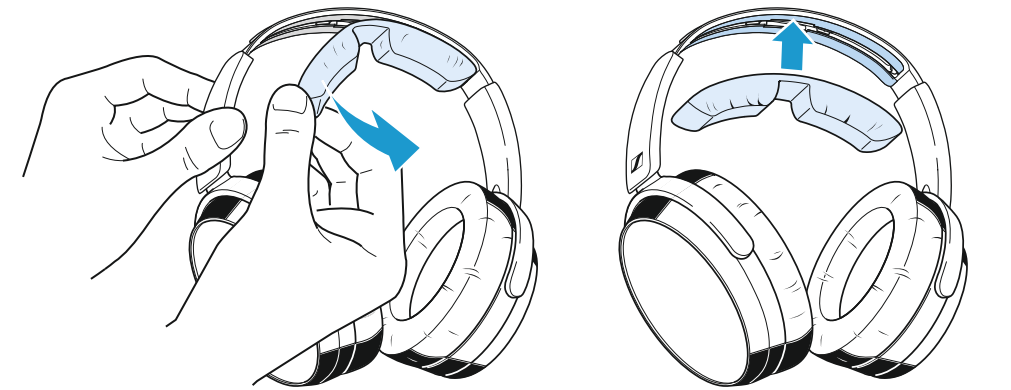

## Specifications

Acoustic principle	closed
Ear coupling	circumaural
Transducer principle	dynamic
Transducer	38 mm
Transmission range	3 Hz to 28,700 Hz (-10 dB)
Sensitivity	107 dB SPL (1 kHz/1 Vrms) 98 dB SPL (1 kHz/1 mW)
Max. sound pressure level	130 dB SPL (1 kHz 5% THD)
Harmonic distortion	<0,5 % (1 kHz, 100 dB SPL)
Impedance	130 Ω (1 kHz)
Power rating	300 mW (100h, noise IEC 60268)
Headband pressure	4,5 N ± 0,5 N
Temperature range	operation: +0 °C to 50 °C storage: -25 °C to 70 °C
Rel. humidity	operation: 10 to 80 %, not condensing storage: 10 to 90 %
Weight	272 g (without cable)

## Cleaning

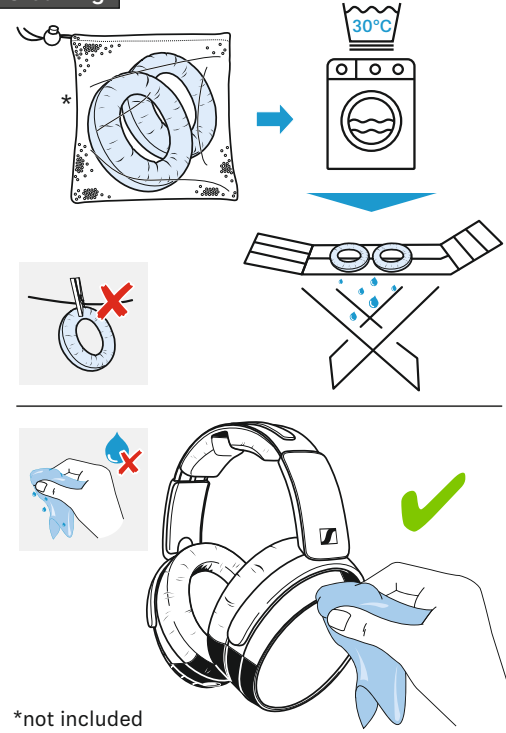

\*not included