



# HSP 2 HSP 4

Quick Guide  
Kurzanleitung  
Guide de démarrage rapide  
Guida rapida  
Instrucciones resumidas  
Instruções resumidas  
Beknopte gebruiksaanwijzing  
Krótka instrukcja obsługi  
Snabbguide

Kort vejledning  
Pikaohje  
Σύντομες οδηγίες  
Kisa Kilavuz  
Краткая инструкция  
快速指南  
快速使用指南  
クイックガイド  
요약 안내서

**SENNHEISER**



[www.sennheiser.com/documentation](http://www.sennheiser.com/documentation)



[www.sennheiser.com/download](http://www.sennheiser.com/download)

Sennheiser electronic SE & Co. KG

Am Labor 1, 30900 Wedemark, Germany  
[www.sennheiser.com](http://www.sennheiser.com)

Printed in Germany, Publ. 11/25, 587440 /A03

### In the box

	Connector						
HSP 2 	3.5 mm	•	•	•	•		
	3-Pin	•	•	•	•		
HSP 4 	3.5 mm	•	•				•
	3-Pin	•	•				•



3.5 mm jack plug

or



3-Pin connector

### Setup

**3.5 mm jack plug**

**3-Pin connector**

\*optional accessories

### Adjust

### Setup

- 
- 
- 
- 
- 
- 
- 

### Use


**HSP 2**

2-3 cm


**HSP 4**

**Accessory**

**HSP 2**  
Frequency cap

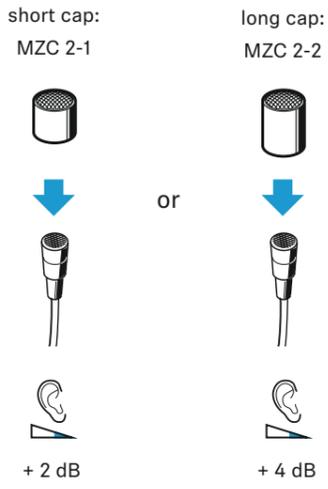

**HSP 2**  
Windshields



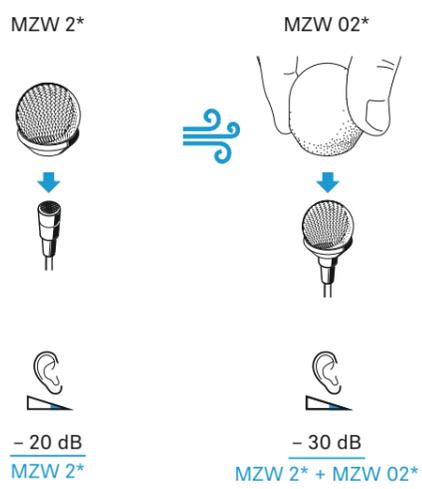


\*optional accessories

**Specifications**



	HSP 2	HSP 4
Frequency response	20 - 20,000 Hz ±3 dB	40 - 20,000 Hz ±3 dB
Pick-up pattern	omni-directional	cardioid
Nominal impedance	1 kΩ	
Min. terminating impedance	4.7 kΩ	
Sensitivity	2 mV/Pa ±3 dB	4 mV/Pa ±3 dB
Diameter of mic capsule	4.8 mm	8.4 mm
Max. sound pressure level	150 dB	
Equivalent noise level	28 dB(A)	37 dB(A)
Supply current	approx. 250 µA	
Power supply	4.5 - 15 V	
Temperature range	-10 °C to +50 °C	
Cable length	1.6 m	1.6 m
Diameter of boom arm	1.1 mm	2.0 mm
Weight	2.1 g	4.8 g
Connector	3.5 mm jack or 3-Pin	
<b>Neckband</b>		
Width	110 mm	
Weight	4.4 g	

**Cleaning**

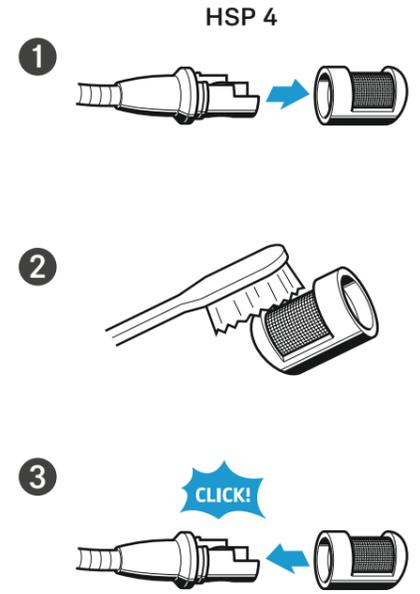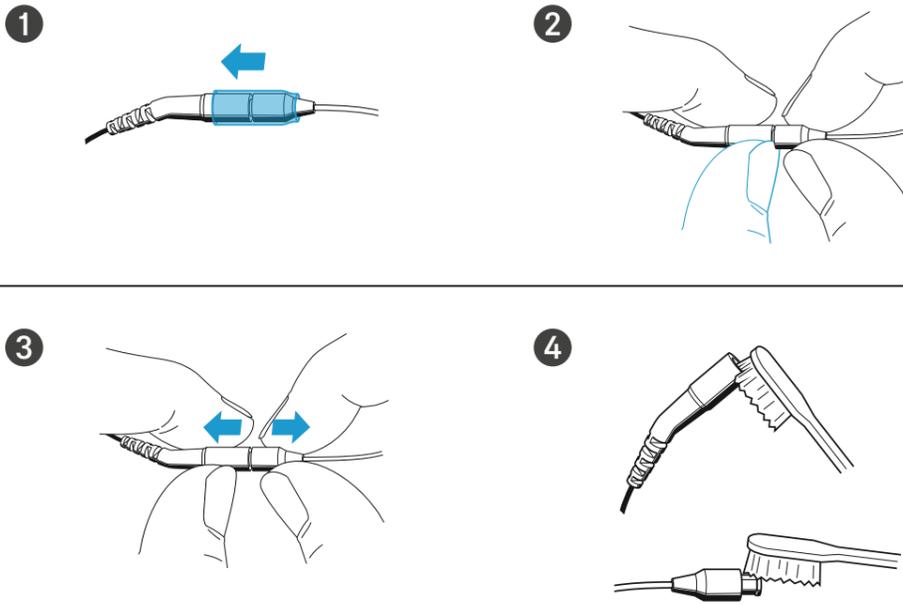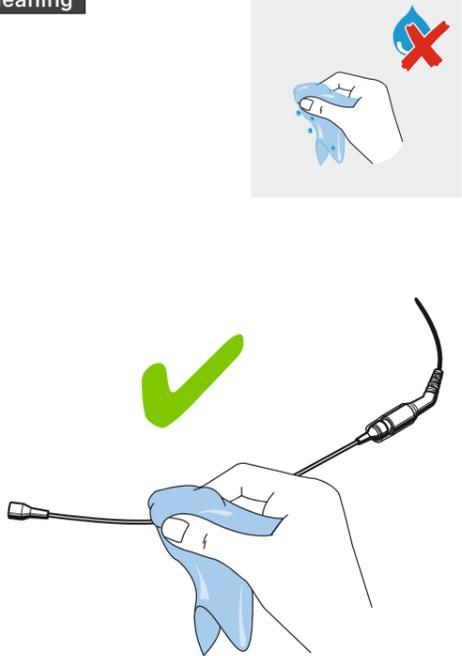

**Polar pattern and frequency response**

**HSP 2**

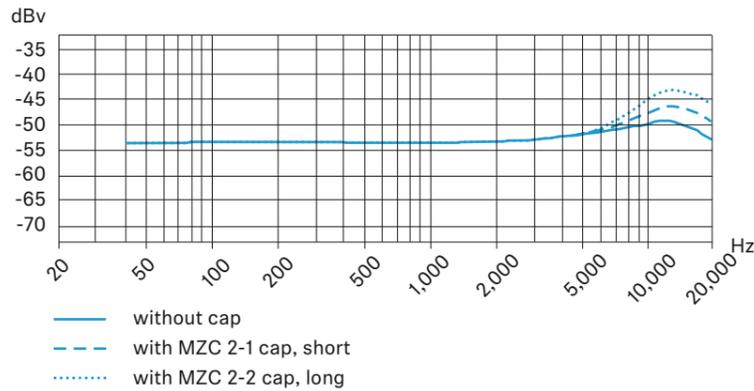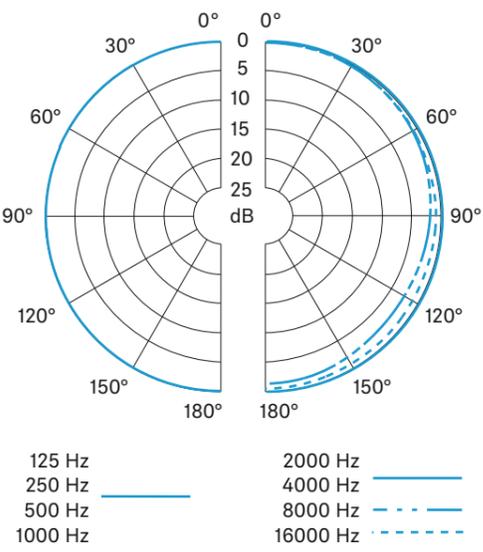

**HSP 4**

