



MKH 8020 MKH 8020 Stereoset

Quick Guide
Kurzanleitung
Guide rapide
Guía rápida
Guía de inicio rápido
Guia rápido
Beknopte handleiding
Krátká instrukcja obsługi
Snabbguide

Kort vejledning
Pikaohje
Γρήγορος οδηγός
Kısa Kılavuz
Краткая инструкция
快速指南
快速使用指南
クイックガイド
퀵 가이드

SENNHEISER



www.sennheiser.com/documentation



www.sennheiser.com/download


Sennheiser electronic SE & Co. KG

Am Labor 1, 30900 Wedemark, Germany
www.sennheiser.com


Publ. 04/26, 581390/A05

In the box

MKH 8020

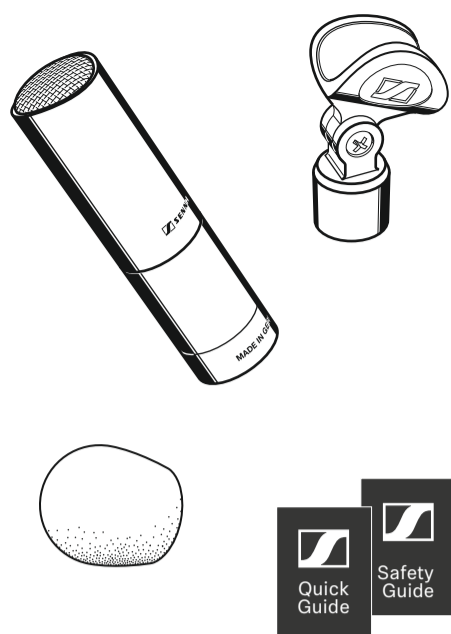


MKH 8020 Stereoset



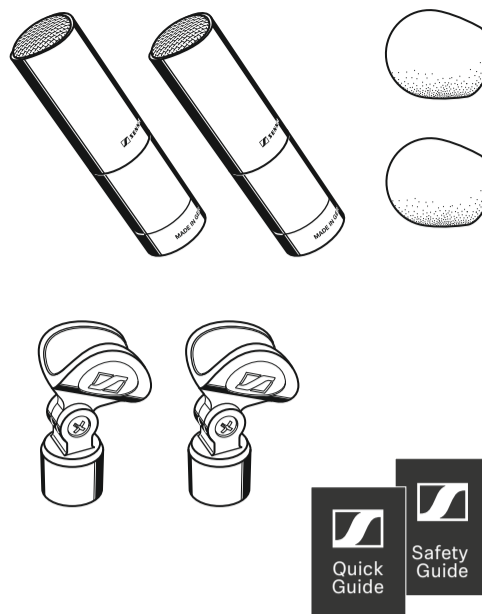


Overview

- 1 Microphone head
- 2 XLR module

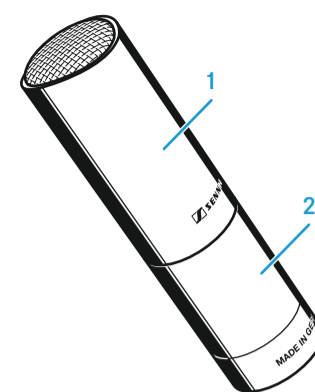


Setup

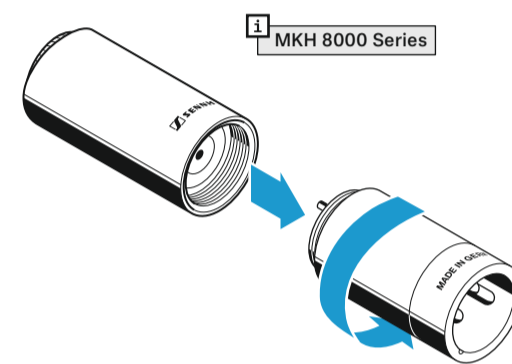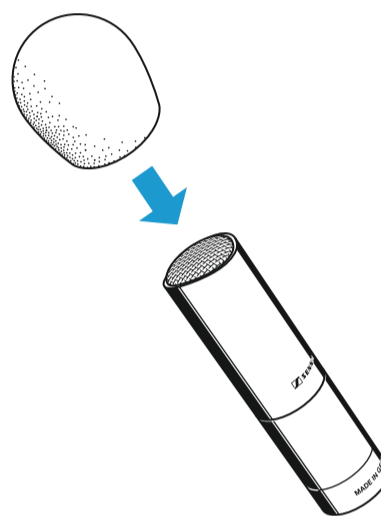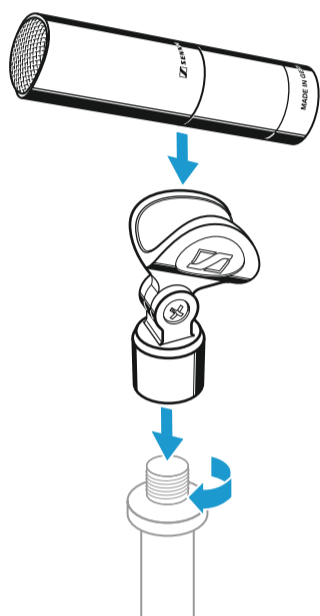


Stereo recording


Time-of-arrival stereo (AB):
(almost) only time-of-arrival differences




Intensity stereo (XY):
only sound pressure level differences





Equivalence or mixed stereo (here: ORTF):
sound pressure level and time-of-arrival differences



Baffle stereo (here: OSS):
sound pressure level, time-of-arrival and spectral differences with off-axis sound



Polar pattern and frequency response

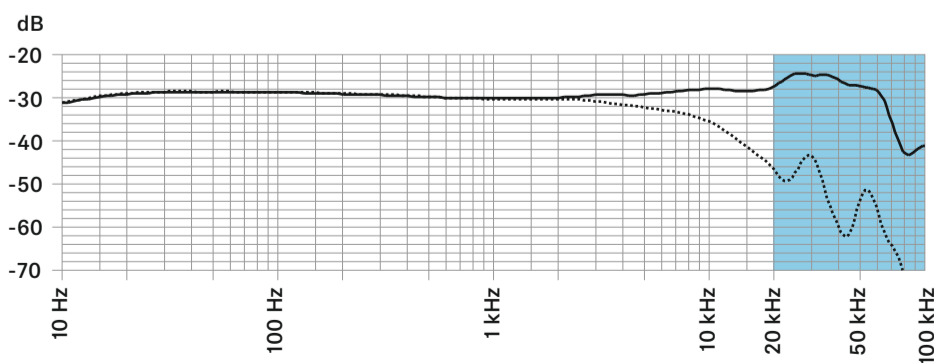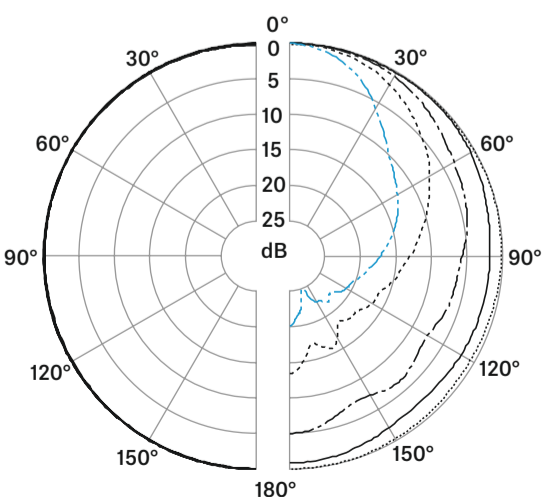

125 Hz ———
250 Hz ———
500 Hz ———
1,000 Hz ———
2,000 Hz
4,000 Hz ———
8,000 Hz - - -
16,000 Hz
32,000 Hz - · - · -

..... 90°
——— 0°

Specifications

Pick-up pattern	omni-directional
Frequency response	10 - 60,000 Hz
Sensitivity	-30 dBV/Pa (31 mV/Pa) with MZF 8000 II -40 dBV/Pa (10 mV/Pa)
Max. SPL	138 dB with MZF 8000 II 133 dB
Equivalent noise level	A-weighted 10 dB(A) CCIR-weighted 121 dB
Phantom powering	48 V ±4 V (P48, IEC 61938)
Current consumption	3.3 mA
Diameter	approx. 19 mm
Length	approx. 41 mm with MZF 8000 II approx. 75 mm
Weight	approx. 25 g with MZF 8000 II approx. 55 g
Operating temperature	-10 °C to 60 °C

MKH 8000 Series

Microphone and accessories overview



MKH 8020
RF-condensor mic, omni



MKH 8030
RF-condensor mic, fig-of-eight



MKH 8040
RF-condensor mic, cardioid



MKH 8050
RF-condensor mic, super-cardioid



MKH 8090
RF-condensor mic, cardioid, wide cardioid

Delivery included accessories



MZX 8000
XLR module



MZQ 8000
Mic clamp



MZW 8000 / MZW 8030
Foam windshield for
MZW 8030 for MKH 8030, all others: MZW 8000

Optional accessories



MZF 8000 II
Screw filter module MZF 8000 II at suitable place
between microphone head and XLR module.



MZL 8003
Connecting cable, 3 m



MZL 8010
Connecting cable, 10 m

Microphone stand



Microphone stand
Vertical bar & foot stand



MZE 8060 / MZE 8120
Extension tube 0.60 m / 1.20 m



MZGE 8000
Tube connector



MZEF 8060 / MZEF 8120
Vertical bar 0.60 m / 1.20 m



MZFS 8000
Floor stand

Table / Ceiling mounting



MZT 8000
Table stand



MZH 8042
Goose neck



MZH 8000
Ceiling mount



MZQ 8001
Mini clip



MZG 8000
Swivel joint



MZS 31
Shockmount

Shotgun microphones

Delivery included accessories



MKH 8060
RF-condensor mic, short shotgun



MKH 8070
RF-condensor mic, long shotgun



MZX 8000
XLR module



MZW 8060 / MZW 8070
Foam windshield
MZW 8060 for MKH 8060
MZW 8070 for MKH 8070



MZQ 8060
Mic clamp

Optional accessories



MZF 8000 II
Screw filter module MZF 8000 II at suitable place
between microphone head and XLR module.




MZL 8003
Connecting cable, 3 m




MZL 8010
Connecting cable, 10 m



Outdoor use



MZS 20-1
Pistol grip



MZW 20-1 / MZW 80
short windshield basket / long windshield basket



MZH 20-1 / MZH 80
Wind muff for MZW 20-1 / for MZW 80