



XS Wireless In-Ear Monitoring System

Model: XSW IEM SR
XSW IEM EK

Quick Guide	Kort vejledning
Kurzanleitung	Pikaohje
Guide de démarrage rapide	Σύντομες οδηγίες
Guida rapida	Kısa Kılavuz
Instrucciones resumidas	Краткая инструкция
Instruções resumidas	快速指南
Beknopte gebruiksaanwijzing	快速使用指南
Krótka instrukcja obsługi	クイックガイド
Snabbguide	요약 안내서
	دليل مختصر

SENNHEISER



www.sennheiser.com/documentation



www.sennheiser.com/download

Sennheiser electronic SE & Co. KG

Am Labor 1, 30900 Wedemark, Germany
www.sennheiser.com

Publ. 02/26, 587447/A07

In the box

XS WIRELESS IEM	SET	EK	SR
	✓	✓	
	✓		✓
	✓		✓
	✓	✓	
	✓	✓	
	✓		

XSW IEM SR




XSW IEM EK




Battery




Setup

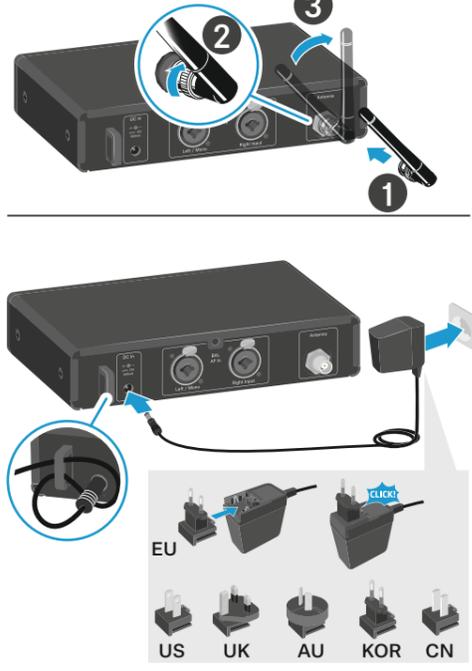

Mounting

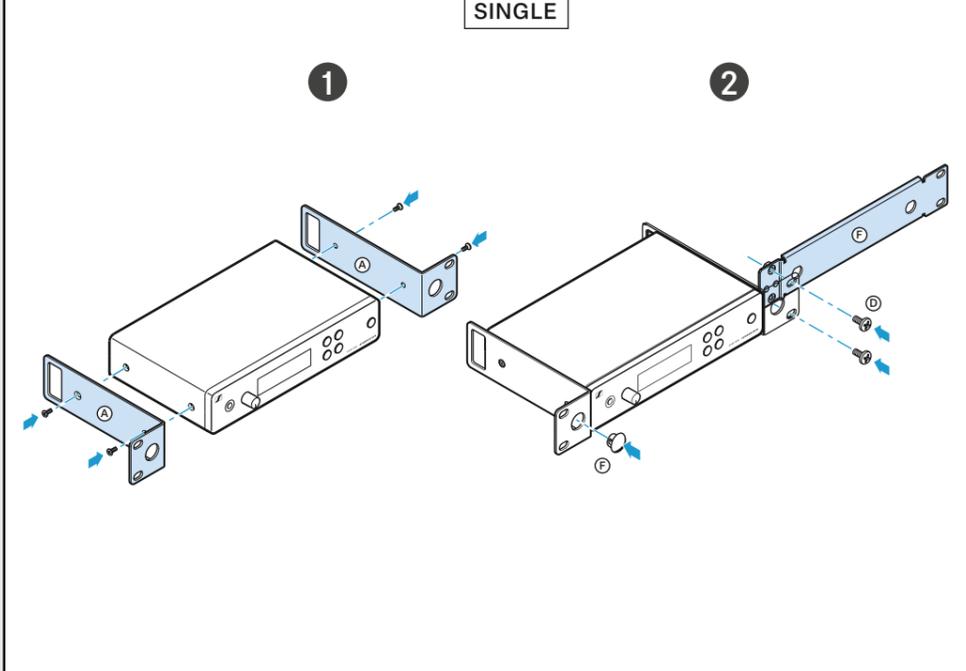

Mounting

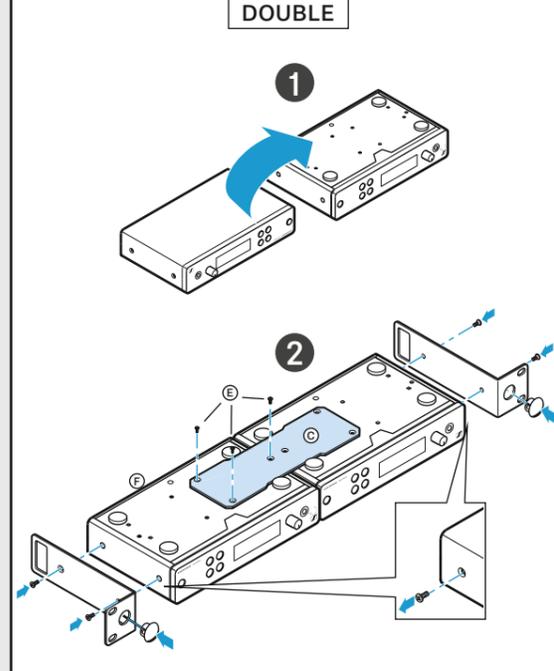

On



Off



Standard display

STANDARD DISPLAY

- 1 Frequency
- 2 Bank
- 3 Channel
- 4 Audio Level
- 5 RF Signal Level
- 6 Battery Status
- 7 Limiter (ON/OFF)
- 8 Equalizer (ON/OFF)
- 9 Focus (ON/OFF)
- 10 Panorama (L09 -- R09)
- 11 Mono/Stereo Settings
- 12 Menu Settings
- 13 Input Sensitivity

LED status XSW IEM EK

LINK PHONES VOLUME

NO LINK
LOW BAT
AUDIO OVERLOAD
AUDIO LEVEL
LINK OK
SYNC

Menu XSW IEM SR

AUDIO PRESET TUNE
TUNE B
AUDIO STEREO GAIN
PRESET B CH
STEREO MONO
0dB
-21dB
01
08
U
L9...R9
--

Menu XSW IEM EK

MENU
B
CH
LIM
EQ
FOCUS
PAN
572.200 MHz
B
U
B1
...B8
CH
CH01
...CH08
OFF
ON
--
L9...R9
572.200 MHz
... MHz

Battery status

RF	AF	LIM	EQ	FOCUS	B 01	CH 01	PAN --	572.200 MHz	LOW BAT	25 %	50 %	75 %	100 %
										≤ 1.5h	≤ 3h	≤ 4.5h	≤ 6h

Low battery

RF
AF
LIM EQ FOCUS
B 01 CH 01 PAN --
572.200 MHz

0.5s 0.5s

Stereo

6.3 mm OR XLR-3

AUX

2 x SET

STEREO 572.200 MHz AUDIO
L R B CH GAIN
01 01 0dB

Mono

6.3 mm OR XLR-3

AUX

2 x SET

MONO 572.200 MHz AUDIO
L B CH GAIN
01 01 0dB

Phones

WARNING! HIGH VOLUME

1

2

VOLUME

6.3 mm

Sync

≤ 10 cm
≤ 4"

572.200 MHz

0.2s
0.1s

Input sensitivity

2 x SET

STEREO 572.200 MHz AUDIO
L R B CH GAIN
01 01 -3dB

STEREO 572.200 MHz AUDIO
L R B CH GAIN
01 01 0dB

STEREO 572.200 MHz AUDIO
L R B CH GAIN
01 01 0dB

MONO 572.200 MHz AUDIO
L B CH GAIN
01 01 0dB

STEREO 572.200 MHz AUDIO
L R B CH GAIN
01 01 0dB

-21 dB ... 0 dB

Multichannel setup

IEM SYSTEM

BANK	CH
2	3
2	4
2	5
2	6

BANK	CH
1	1
1	2
1	3
1	8

BANK	CH
2	3
1	3
4	7
8	9

BANK	CH
2	3
2	3
2	3