



# evolution wireless G4

## SK 300 G4-RC | Bodypack Transmitter



### FEATURES

- Robust bodypack transmitter for use with any Sennheiser headmic or lavalier microphone (HEADMIC 1, ME 2 recommended)
- Easy to use, fast setup time
- Integrated network port allows control, monitoring and setup via Sennheiser Control Cockpit and WSM Software
- Broad range of products and existing accessories (such as microphones) allows usage in any kind of environment
- Up to 88 MHz bandwidth, up to 32 channels
- Increased RF output power (10/30/50 mW)
- Transmission Range: up to 100 meters / 330 feet
- Compatible with wireless speaker system LSP 500 PRO
- RC (remote control) switch available for the bodypack transmitter

Robust bodypack transmitter with increased bandwidth and transmission power for evolution wireless G4 300 Series systems, delivering exceptional speech intelligibility in Business and Education.

### DELIVERY INCLUDES

- SK 300 G4-RC bodypack transmitter
- 2 AA batteries
- pouch
- quick guide
- safety guide
- manufacturer declaration sheet

### ACCESSORIES

|                |                      |                 |
|----------------|----------------------|-----------------|
| <b>RMS 1</b>   | Remote mute switch   | Art. no. 503164 |
| <b>BA 2015</b> | rechargeable battery | Art. no. 009950 |
| <b>L 2015</b>  | charger              | Art. no. 009828 |
| <b>CL 2</b>    | microphone cable     | Art. no. 004840 |

### PRODUCT VARIANTS

#### Made in Germany

|                         |                 |                 |
|-------------------------|-----------------|-----------------|
| <b>SK 300 G4-RC-K+</b>  | 925 - 937.5 MHz | Art. no. 507719 |
| <b>SK 300 G4-RC-GBw</b> | 606 - 678 MHz   | Art. no. 507720 |
| <b>SK 300 G4-RC-Gw</b>  | 558 - 626 MHz   | Art. no. 507721 |
| <b>SK 300 G4-RC-Bw</b>  | 626 - 698 MHz   | Art. no. 507722 |
| <b>SK 300 G4-RC-Cw</b>  | 718 - 790 MHz   | Art. no. 507723 |
| <b>SK 300 G4-RC-Dw</b>  | 790 - 865 MHz   | Art. no. 507724 |
| <b>SK 300 G4-RC-Aw+</b> | 470 - 558 MHz   | Art. no. 508406 |

#### Assembled in USA

|                         |               |                 |
|-------------------------|---------------|-----------------|
| <b>SK 300 G4-RC-AS</b>  | 520 - 558 MHz | Art. no. 508059 |
| <b>SK 300 G4-RC-JB</b>  | 806 - 810 MHz | Art. no. 508060 |
| <b>SK 300 G4-RC-Gw</b>  | 558 - 626 MHz | Art. no. 508061 |
| <b>SK 300 G4-RC-Bw</b>  | 626 - 698 MHz | Art. no. 508062 |
| <b>SK 300 G4-RC-Cw</b>  | 718 - 790 MHz | Art. no. 508063 |
| <b>SK 300 G4-RC-Dw</b>  | 790 - 865 MHz | Art. no. 508064 |
| <b>SK 300 G4-RC-Aw+</b> | 470 - 558 MHz | Art. no. 508427 |
| <b>SK 300 G4-RC-Gw1</b> | 558 - 608 MHz | Art. no. 508448 |



# evolution wireless G4

## SK 300 G4-RC | Bodypack Transmitter

### SPECIFICATIONS

| RF characteristics             |   |
|--------------------------------|---|
| Modulation                     | Wideband FM   |
| Frequency ranges               | Aw+: 470 - 558 MHz<br>AS: 520 - 558 MHz<br>Gw1: 558 - 608 MHz<br>Gw: 558 - 626 MHz<br>GBw: 606 - 678 MHz<br>Bw: 526 - 698 MHz<br>Cw: 718 - 790 MHz<br>Dw: 790 - 865 MHz<br>JB: 806 - 810 MHz<br>K+: 925 - 937.5 MHz |
| Transmission frequencies       | Max. 3520 frequencies, adjustable in 25 kHz steps<br><br>20 frequency banks, each with up to 32 factory-pre-set channels, no intermodulation<br><br>6 frequency banks with up to 32 programmable channels           |
| Switching bandwidth            | up to 88 MHz  |
| Nominal/peak deviation         | $\pm 24$ kHz / $\pm 48$ kHz   |
| Frequency stability            | $\leq \pm 15$ ppm   |
| RF output power at 50 $\Omega$ | switchable:<br>Low: typ. 10 mW<br>Standard: typ. 30 mW<br>High: typ. 50 mW  |
| Pilot tone squelch             | Can be switched off   |

| AF characteristics                           |   |
|--|---|
| Compander system                             | Sennheiser HDX                              |
| AF frequency response                        | Mic: 80 - 18,000 Hz<br>Line: 25 - 18,000 Hz |
| Signal-to-noise ratio (1 mV, peak deviation) | $\geq 115$ dBA                              |
| Total harmonic distortion (THD)              | $\leq 0.9$ %                                |
| Max. microphone/line input voltage           | 3 V <sub>eff</sub>                          |
| Microphone/line input impedance              | 40 k $\Omega$ , unbalanced / 1 M $\Omega$   |
| Input capacitance                            | Switchable                                  |
| Setting range for input sensitivity          | 60 dB, adjustable in 3 dB steps             |


| Overall device           |  |
|--------------------------|--|
| Temperature range        | -10 °C to +55 °C   |
| Power supply             | 2 AA batteries, 1.5 V or BA 2015 accupack  |
| Nominal voltage          | 3 V battery / 2.4 V rechargeable battery   |
| Current consumption      | at nominal voltage:<br>typ. 180 mA<br>with transmitter switched off: $\leq 25$ $\mu$ A |
| Operating time           | Typically 8 h  |
| Dimensions               | Approx. 82 x 64 x 24 mm  |
| Weight (incl. batteries) | approx. 160 g  |



# evolution wireless G4



## SK 300 G4-RC | Bodypack Transmitter

### DIMENSIONS

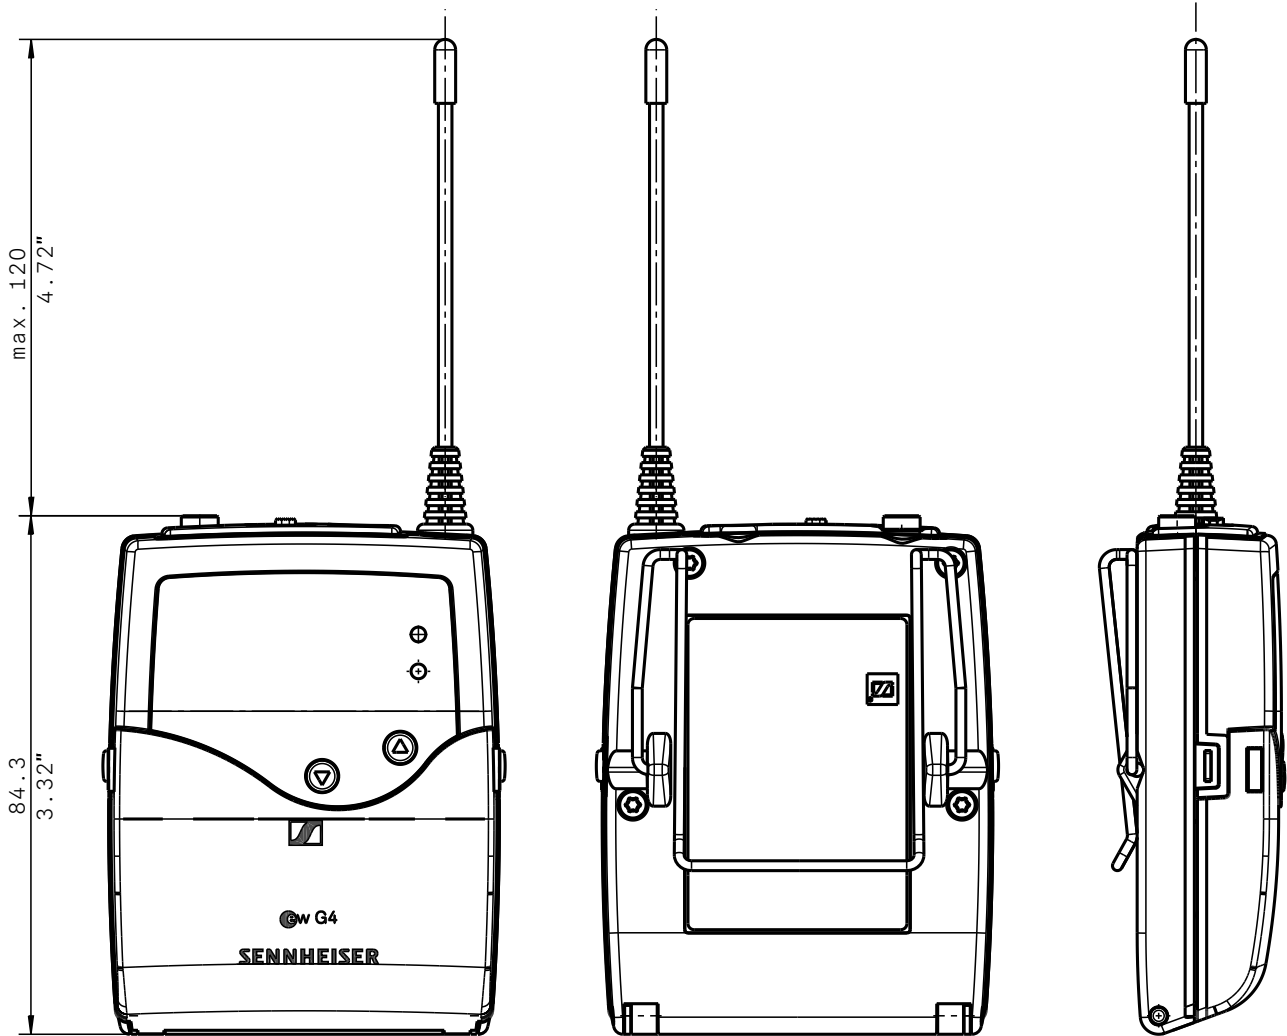

3,5mm Klinke  
3,5mm plug

2,5mm Klinke  
2,5mm plug

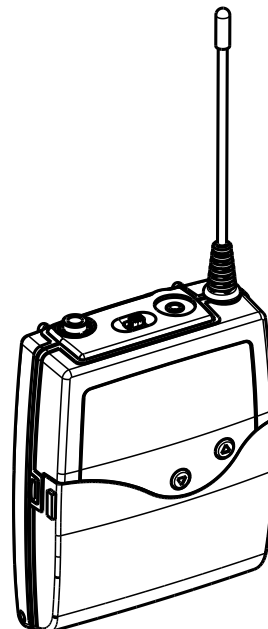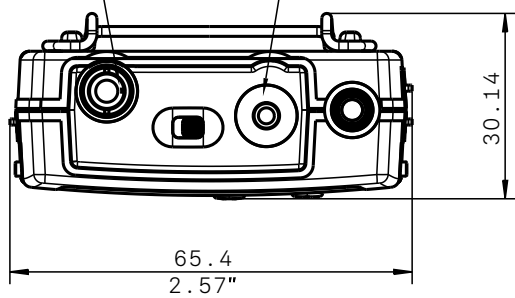



# evolution wireless G4

## SK 300 G4-RC | Bodypack Transmitter

### ARCHITECT'S SPECIFICATION

The compact bodypack transmitter shall be for use with a companion receiver as part of a wireless RF transmission system.

The bodypack transmitter shall operate within ten UHF frequency ranges, with a switching bandwidth of up to 88 MHz: 470 – 558 MHz, 520 – 558 MHz, 558 – 608 MHz, 558 – 626 MHz, 606 – 678 MHz, 626 – 698 MHz, 718 – 790 MHz, 790 – 865 MHz, 806 – 810 MHz, 925 – 937.5 MHz; transmission frequencies shall be 3520 per range and shall be tunable in 25 kHz steps. The bodypack transmitter shall feature 20 fixed frequency banks with up to 32 compatible frequency presets and 6 user banks with up to 32 user programmable frequencies.

The bodypack transmitter shall be menu-driven with a backlit LC display showing the current frequency, frequency bank and channel number, metering of AF level, transmission status, lock status, pilot tone transmission, muting function, and battery status. An auto-lock feature shall be provided to prevent settings from being accidentally altered.

The bodypack transmitter parameters shall either be configurable in the associated receiver's menu and synchronized with the bodypack transmitter via an integrated infrared interface or shall be programmable in the bodypack transmitter menu.

The bodypack transmitter shall be equipped with a mute switch, which shall be switchable between "AF on/off", "RF on/off" and "Disabled" via the receiver's user interface. A 2.5 mm jack socket shall be provided for connecting a Sennheiser RMS 1 external mute switch. The settings for the external mute switch shall be switchable between "AF on/off", "RF on/off", "Push to mute" and "Push to talk" via the user interface.

Nominal/peak deviation shall be  $\pm 24$  kHz/ $\pm 48$  kHz. Frequency stability shall be  $\leq \pm 15$  ppm. RF output power at 50  $\Omega$  shall be switchable between 10 mW (typical, low) and 30 mW (typical, standard) and 50 mW (typical, high).

The bodypack transmitter shall incorporate the Sennheiser HDX compander system and a defeatable pilot tone squelch. Audio frequency response shall range from 80 – 18,000 Hz (microphone) or 25 - 18,000 Hz (line). Signal-to-noise ratio at 1 mV and peak deviation shall be  $\geq 115$  dBA. Total harmonic distortion (THD) shall be  $\leq 0.9$  %. Input sensitivity shall be adjustable within a 60 dB range in steps of 3 dB.

Power shall be supplied to the bodypack transmitter by two 1.5V AA size batteries or by one Sennheiser BA 2015 rechargeable accupack. Nominal voltage shall be 2.4 V, current consumption shall be typical 180 mA at nominal voltage;  $\leq 25$   $\mu$ A when bodypack transmitter is switched off. Operating time shall be typical 8 hours. The bodypack transmitter shall have a rugged metal housing; dimensions shall be approximately 82 x 64 x 24 mm (3.23" x 2.52" x 0.94"). Weight including the batteries shall be approximately 160 grams (5.64 oz). Operating temperature shall range from  $-10$   $^{\circ}$ C to  $+55$   $^{\circ}$ C ( $+14$   $^{\circ}$ F to  $+131$   $^{\circ}$ F).

The bodypack transmitter shall be the Sennheiser SK 300 G4-RC.