




MAT 133 | MAT 133-S MAT 153-S

Quick Guide
 Kurzanleitung
 Guide de démarrage rapide
 Guida rapida
 Instrucciones resumidas
 Instruções resumidas
 Beknopte gebruiksaanwijzing
 Krótka instrukcja obsługi
 Snabbguide

Kort vejledning
 Pikaohje
 Γρήγορος οδηγός
 Kısa Kılavuz
 Краткая инструкция
 快速指南
 快速使用指南
 クイックガイド
 퀵 가이드

SENNHEISER

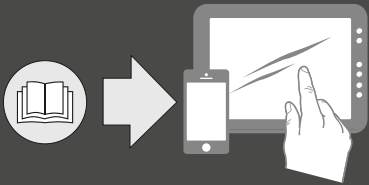

Sennheiser Documentation App



or online at
www.sennheiser.com/download
 MAT 133_


Sennheiser electronic GmbH & Co. KG

Am Labor 1, 30900 Wedemark, Germany
www.sennheiser.com


Printed in Germany, Publ. 07/19, 549118/A03

In the box


MAT 133



MAT 133-S



MAT 153-S



LED status

MAT 133-S
MAT 153-S





- lights up green: microphone active
- lights up red*: microphone muted

*This function is not supported by all PAs/DSPs.



Mounting

Sennheiser goosenecks*:
MZH 30xx | MEG 14-40(-L)


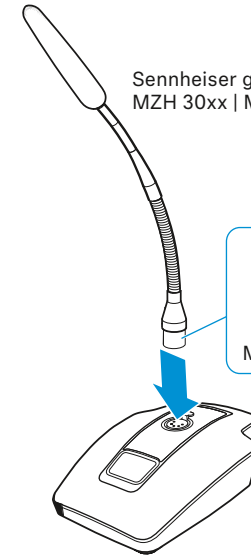


*not included



Setup

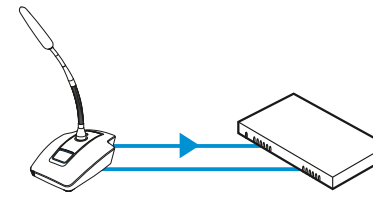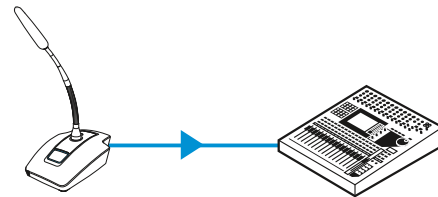

MAT 133-S
MAT 153-S


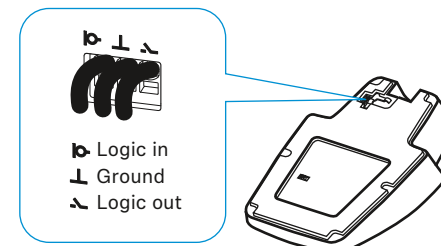
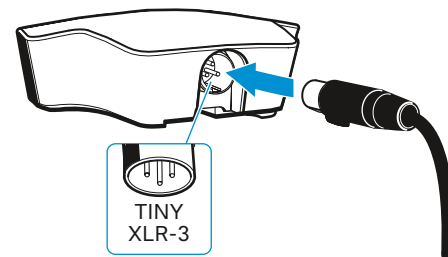


see Instruction manual of the microphone series**



Microphone behavior

MEB 114-S

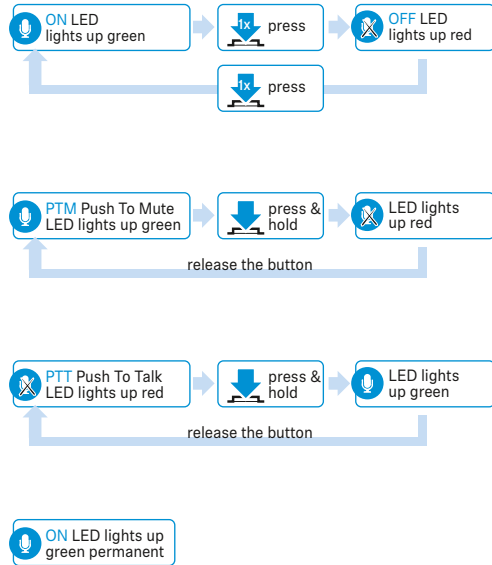

Specifications

	MAT 133	MAT 133-S	MAT 153-S
Current consumption	1.9 mA	3.7 mA	
Power supply	48 V phantom power (P48)		
Logic output	high level output voltage > 2.4 V low level output voltage < 0.4 V		
Connector	MIC IN: XLR-3F MIC OUT: XLR-3M 3x terminal		MIC IN: XLR-5F MIC OUT: XLR-3M 3x terminal
Temperature	operation: -10 °C – +50 °C storage: -25 °C – +70 °C		
Dimensions	120 x 43 x 170 mm		
Weight	approx. 1210 g		