




MobileConnect/ CinemaConnect


Requirements - Network Integrated Mode



Requirements - Network Integrated Mode

This list provides a basic overview of the requirements to integrate ConnectStation's into an existing network infrastructure. Further details please see "[System Information](#)" document.

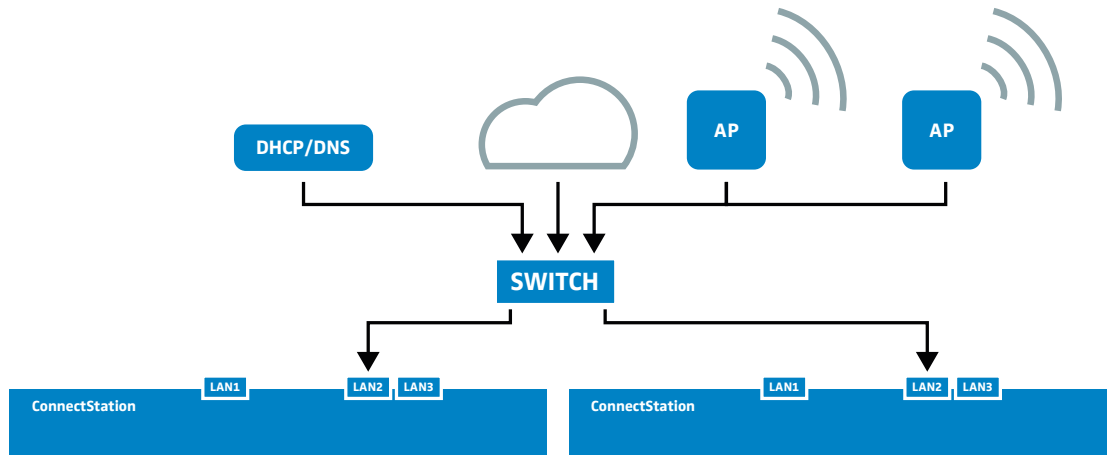

Requirements	Comments
Multiple ConnectStations	<p>ConnectStations:</p> <ul style="list-style-type: none"> Up to 10 ConnectStations in one network <p>Channels:</p> <ul style="list-style-type: none"> 4 channels per ConnectStation up to 40 channels in one network <p>Clients:</p> <ul style="list-style-type: none"> 100 clients per ConnectStation max. 100 clients per 1 channel
Network	<p>"Just like VoIP"</p> <ul style="list-style-type: none"> Use quality enterprise network/WIFI equipment 1 Gbit/s Ethernet network infrastructure QoS support (Prioritization of our traffic)
Network Configuration	<p>Supported Cluster and Service discovery options (at least one have to be implemented in your network):</p> <p>Option 1: Explicit DNS-SD (PTR/SRV)</p> <p>Option 2: Multicast announcement</p> <p>Option 3: Hostname</p>
LAN connections	<ul style="list-style-type: none"> Delivery LAN - DHCP / Static IP Administration LAN - Static IP
Bandwidth	<p>96 - 200 kbit/s per client. The bandwidth usage is similar as for Voice over IP, but without back channel. Please be aware that in WIFI, the actual throughput can diverge significantly from the basic rate</p>
Mobile Clients	<ul style="list-style-type: none"> App available for iOS / Android Mobile clients connecting via delivery LAN 
VPN Uplink (optional)	<p>Optional VPN connection for remote service. Connection is initiated from ConnectStation.</p>