



Dante™ Kit MEG 14-40 basic

FEATURES

- Great speech intelligibility
- Phantom power via PoE
- Remote controllable gain level
- Daisy-chaining possible

DELIVERY INCLUDES

- 1 SL DI 4 XLR Dante™ interface
- 4 MAT 133 tablestands
- 4 MEG 14-40 gooseneck microphones



The MAT 133 is a rugged and unobtrusively designed tablestand. It provides a solid ground for the MEG 14-40 gooseneck microphone. Experience clearly structured meetings and discussions as the intuitive handling will lead the focus on the content – not the technology. The proven Sennheiser KE 10 capsule provides best speech intelligibility.

The SL DI 4 XLR four input Dante™ preamp is the ideal interface for wireless microphone receivers. As analog to digital audio converter, it allows for adding analog microphone systems to a Dante™ system. All Sennheiser XLR microphones and all wireless microphone receivers as well as all SpeechLine Wired installation microphones are compatible with the SL DI 4 XLR.

PRODUCT VARIANTS

Dante Kit MEG 14-40 basic

Art. no. 508208



Dante™ Kit MEG 14-40 basic

SPECIFICATIONS

SL DI 4 XLR

Audio Inputs	
Input type	Balanced and RF filtered
Gain	0 dB, +15 dB, + 30 dB, +45 dB, software selectable 10 dB pad, software selectable
Input impedance	> 1.8 K Ω @ any gain
Maximum input levels	+18 dBu @ 0 dB gain, with pad +8 dBu @ 0 dB gain, no pad -7 dBu @ +15 dB gain, no pad -22 dBu @ +30 dB gain, no pad -36 dBu @ +45 dB gain, no pad
Phantom power	+48 V, 10 mA per input, software selectable
Audio performance	
EIN	-113 dBu
System THD+N	< 0.02 % @ any gain input signal 3 dB below maximum
Frequency response	20 Hz - 20 kHz

Dante™ network	
Physical level	Standard Ethernet
Connector	Single RJ-45
Cable quality	CAT-5
Transmission speed	100 Mbps
Daisy chain	2 units when powered by 802.3af PoE 3 units when powered by external +12 V DC power supply (Sennheiser NT 12-50CS)

Product properties	
Power requirements	Class 0 802.3af PoE PD compliant +12 V DC
Power consumption	2.7 W (225 mA) @ +12 V DC, no phantom power 5.5 W (460 mA) @ +12 V DC, 10 mA phantom power load per input
Dimensions (W x H x D)	219 x 38 x 120 mm (8.63" x 1.50" x 4.74")
Weight	0.77 kg (1.7 lbs)
Operating temperature	0 °C - 40 °C (32 °F - 104 °F)

MAT 133

Phantom power	P24
Current consumption	1.9 mA
Connectors	Mic In - XLR-3F Mic Out - XLR-3M
Pin assignment out	XLR-3M out: 1 = gnd 2 = Audio + 3 = Audio -
Pin assignment in	XLR-3F in: 1 = gnd 2 = Audio + 3 = Audio -
Weight	1,210 g
Dimensions (W x D x H)	120 x 170 x 43 mm (4.72" x 6.69" x 1.69")
Operating temperature	-10 °C to +50 °C (+14 °F to +122 °F)



Dante™ Kit MEG 14-40 basic


SPECIFICATIONS

MEG 14-40


Pick-up pattern	cardioid
Frequency response	50 Hz - 20 kHz
Acoustic principle	gooseneck microphone (condenser)
Output impedance @ 1 kHz	< 100 Ω
Sensitivity	15 mV/Pa
Max. sound pressure level	130 dB @ 1 kHz < 3 %
Equivalent noise level	37 dB (CCIR) 26 dB (A)

Power supply microphone	12 V - 48 V phantom power (P12 - P48)
Current consumption	3 mA
Connector	XLR-5M
Operating temperature	0 °C to 40 °C (32 °F to 104 °F)
Storage temperature	-25 °C to 70 °C (-13 °F to 158 °F)

POLAR DIAGRAM MEG 14-40

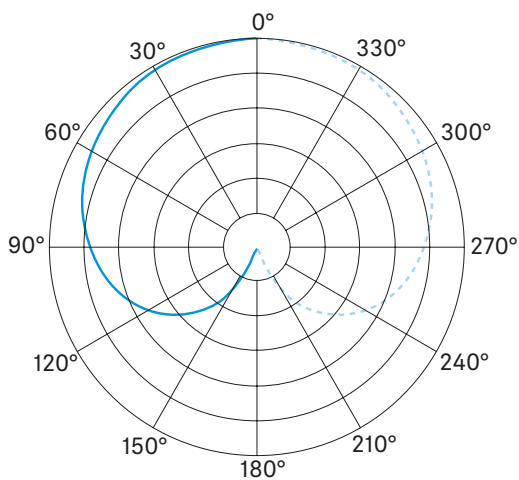


PIN ASSIGNMENT MEG 14-40



- 1 Ground
- 2 Microphone +
- 3 Microphone -

FREQUENCY RESPONSE MEG 14-40

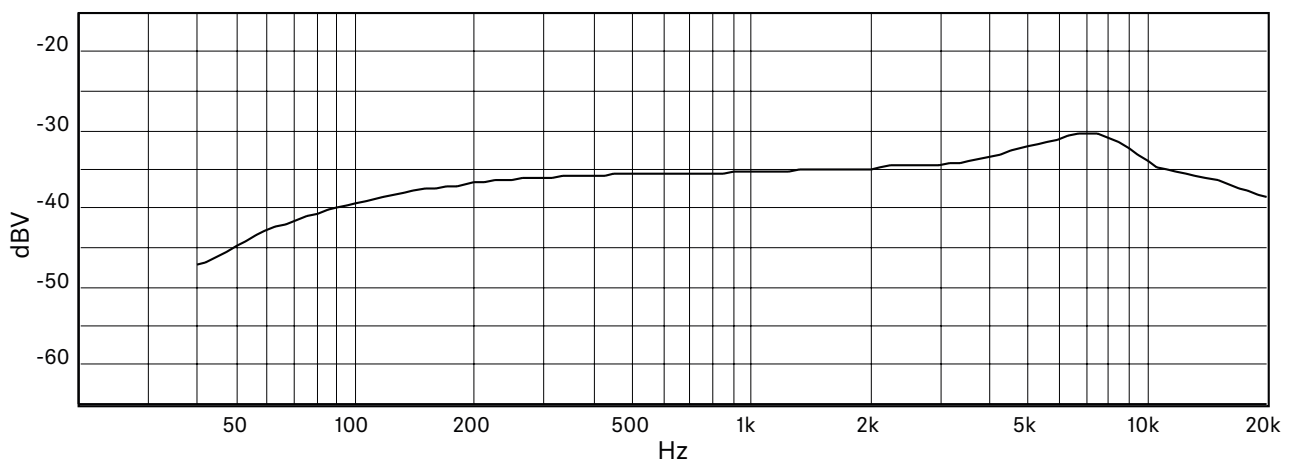




Dante™ Kit MEG 14-40 basic

DIMENSIONS

SL DI 4 XLR

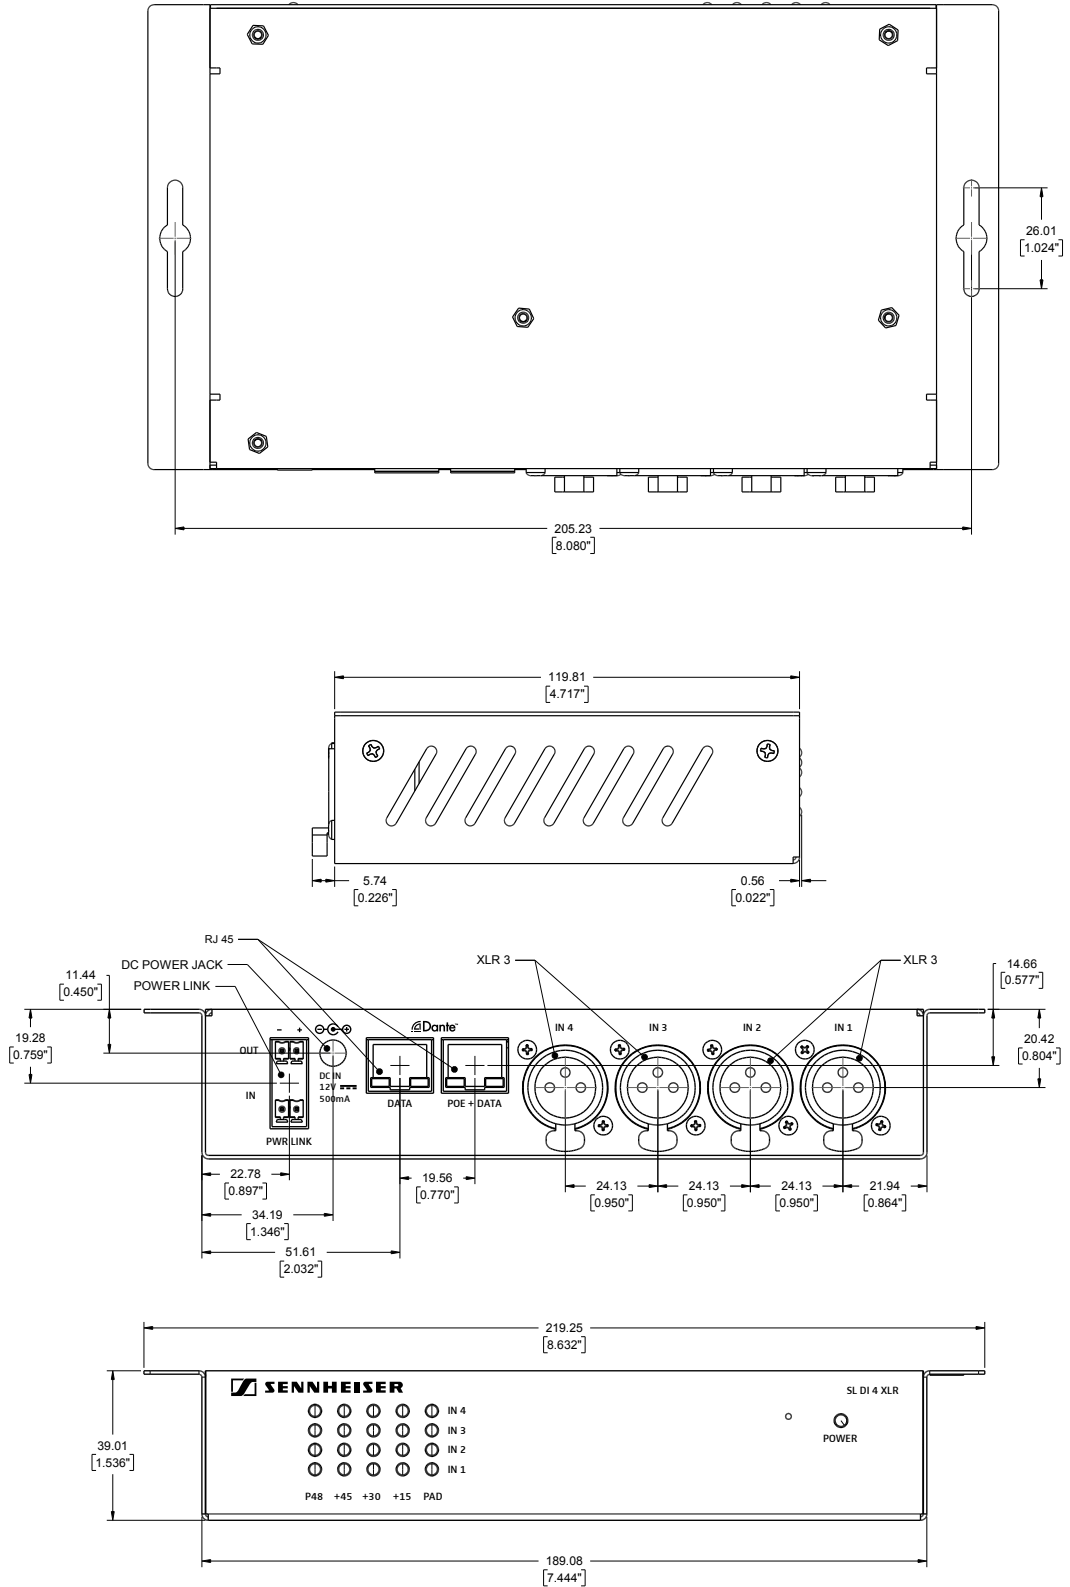





Dante™ Kit MEG 14-40 basic

DIMENSIONS

MAT 133

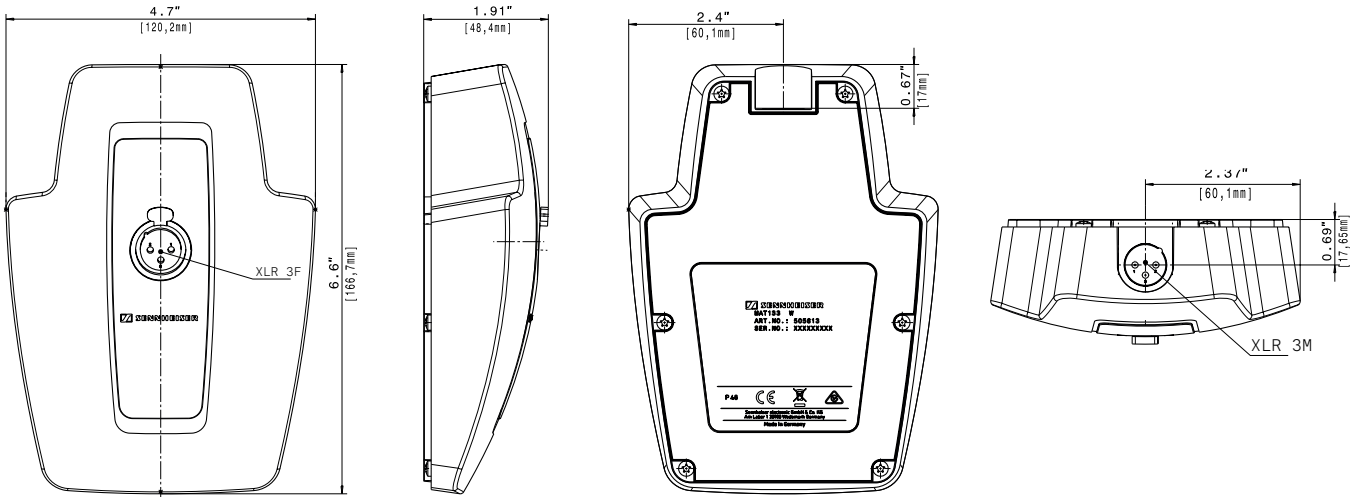

MEG 14-40

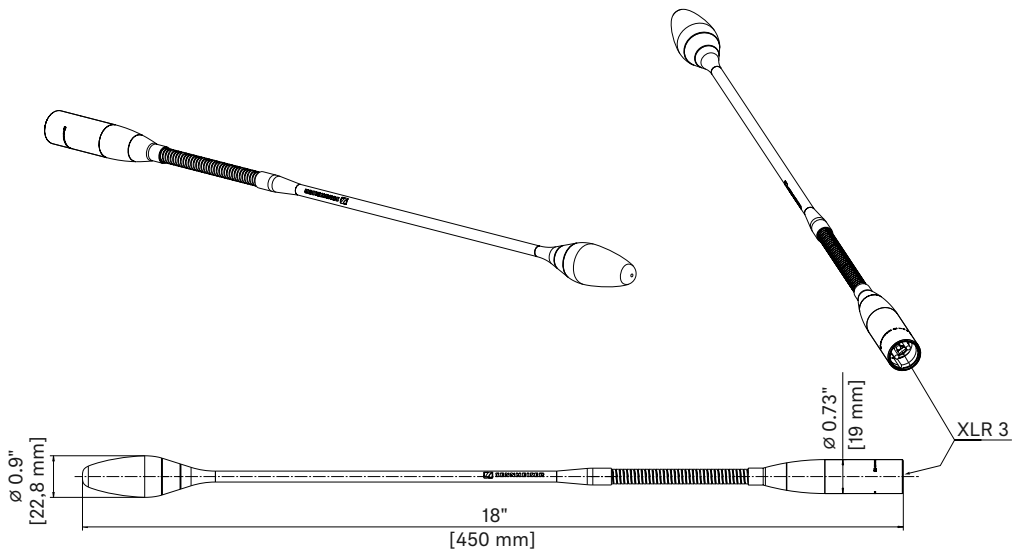



Dante™ Kit MEG 14-40 basic

ARCHITECT'S SPECIFICATION

The Dante™ interface shall feature four balanced and RF filtered mic/line inputs on female XLR-3 connectors and two RJ-45 Ethernet connectors to allow Dante™ daisy chaining (DDC) of multiple units.

Audio frequency response shall range from 20 – 20,000 Hz. Input impedance shall be > 1.8 kΩ at any gain setting. Equivalent input noise shall be -113 dBu. The Dante™ interface shall be powered over the CAT5 Ethernet cable from an 802.3af PoE compliant network switch or from an external +12 V DC power supply. The unit shall support daisy chaining of two units when powered via PoE and shall accept daisy chaining of up to three units when powered via an external +12 V DC power supply. Power consumption shall be 2.7 W (225 mA) @ +12 V DC without phantom power and 5.5 W (460 mA) @ +12 V DC with a 10 mA phantom power load per input.

The Dante™ interface shall have a rugged metal housing with integrated mounting brackets; dimensions (W x H x D) shall be 219 x 38 x 120 mm (8.63" x 1.50" x 4.74"). Weight shall be 0.77 kg (1.7 lbs). Operating temperature shall range from 0 °C to 40 °C (32 °F to 104 °F).

The Dante™ interface shall be the Sennheiser SL DI 4 XLR.

The tablestand for connecting and operating XLR gooseneck microphones shall be rugged and unobtrusive. It shall feature an XLR-3F microphone input and an XLR-3M.

The tablestand shall operate on 24 V phantom power. Current consumption shall be 1.9 mA. Dimensions shall be 120 x 170 x 43 mm (4.72" x 6.69" x 1.69"). Weight shall be 1,210 grams (42,68 oz). Operating temperature shall range from -10 °C to +50 °C (+14 °F to +122 °F).

The tablestand shall be the Sennheiser MAT 133.

The microphone shall be a pre-polarized condenser designed for permanent installation or portable applications. It shall have a microphone capsule with a cardioid polar pattern with uniform 120° angle of acceptance (-3 dB).

It shall have a frequency response of 50 Hz to 20,000 Hz and be capable of handling sound input levels up to 130 dB SPL. Nominal equivalent noise level shall be 26 dBA (37 dB weighted as per CCIR 468-3). Output shall be low impedance balanced (< 100 Ω). Operating temperature shall be 0 °C to 40 °C (32 °F to 104 °F). The microphone shall operate from an external 12 V to 48 V DC phantom power source; current consumption shall be 3 mA. The lighted LED ring shall operate from an external 12 – 30 V DC power source; current consumption shall be 3 mA. The microphone shall offer radio frequency interference (RFI) shielding against intermodulation from wireless equipment or devices.

The microphone shall be a gooseneck design ensuring precise alignment of the microphone. It shall incorporate a self-contained power module with an XLR 3M connector at the base. The microphone shall be a small-diameter gooseneck design with a diameter of 8 mm (0.31") and an overall length of 457.2 mm (18"). Head diameter shall be 22.8 mm (0.9"). The microphone weight shall be 147 g (4.72 oz). Finish shall be matte black.

The microphone shall be the Sennheiser MEG 14-40.